

residual current device RCD510 Basic RCD type A side mounted  
 rated resid. current 0.03...5A at 50/60Hz adjustable tv 0...3000ms 3-  
 pole In=160A Ue=127-480V accessory for: 3VA1 with terminal  
 connection



Model	
Product brand name	SETRON
Product designation	Accessories
Product version	Residual current protection module type A
Product group primary device	3VA11

General technical data	
Mounting type	screw fixing
Number of poles	3
Protection class IP / on the front	IP40

Current	
Current / at AC / rated value	160 A
Response value / of the residual current	0.03;0.05;0.1;0.3;0.5;1;3;5

Mechanical Design	
Product function	
<ul style="list-style-type: none"> <li>• communication with residual current device</li> </ul>	No
<ul style="list-style-type: none"> <li>• Product function / Integrated / alarm management</li> </ul>	Yes


<ul style="list-style-type: none"> <li>• Product function / Integrated / alarm management</li> </ul>	Pre-alarm indication 30%
<ul style="list-style-type: none"> <li>• Product function / remote tripping</li> </ul>	No
<ul style="list-style-type: none"> <li>• Functionality/sealable</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Product function / selectable tripping characteristic</li> </ul>	No
<ul style="list-style-type: none"> <li>• Product function / selectable RCD or monitoring mode</li> </ul>	Yes
Remote reset function	No
Position / of the infeed / on the RCD component	Top or bottom
Type of electrical connection / for main current circuit	Cable connection of basic breaker
Setting values / of the limit value of not tripping time	0;0.06;0.15;0.3;0.5;1.0;2.0;3.0
Type of trip indicator / electrical	Yes
Type of trip indicator / communication	No
Rated frequency	60 Hz
Operating frequency	50/60Hz
Height	187 mm
Width	106.4 mm
Depth	70 mm
Net weight	810 g
Ambient temperature / during operation	
<ul style="list-style-type: none"> <li>• minimum</li> </ul>	-25 °C
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	70 °C

### Certificates

<b>General Product Approval</b>	<b>EMC</b>	<b>Declaration of Conformity</b>
---------------------------------	------------	----------------------------------



<b>Test Certificates</b>	<b>Shipping Approval</b>	<b>other</b>
--------------------------	--------------------------	--------------

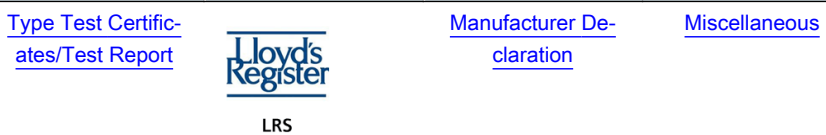

### Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**  
<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3VA9113-0RS20>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3VA9113-0RS20>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**



[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3VA9113-0RS20](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3VA9113-0RS20)

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Tender specifications**

<http://www.siemens.com/specifications>

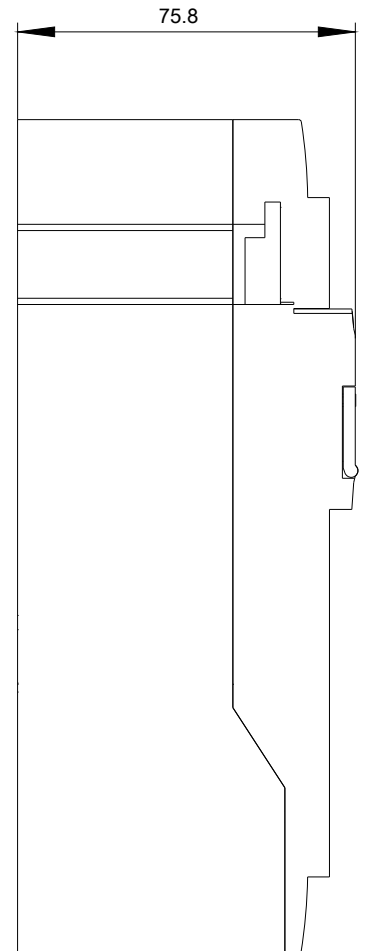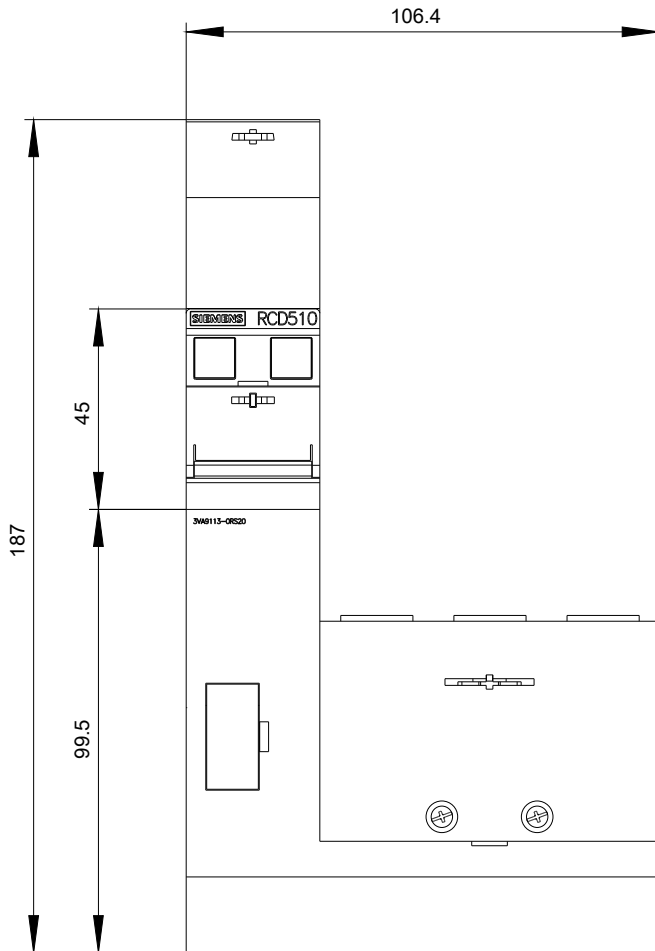

-A1

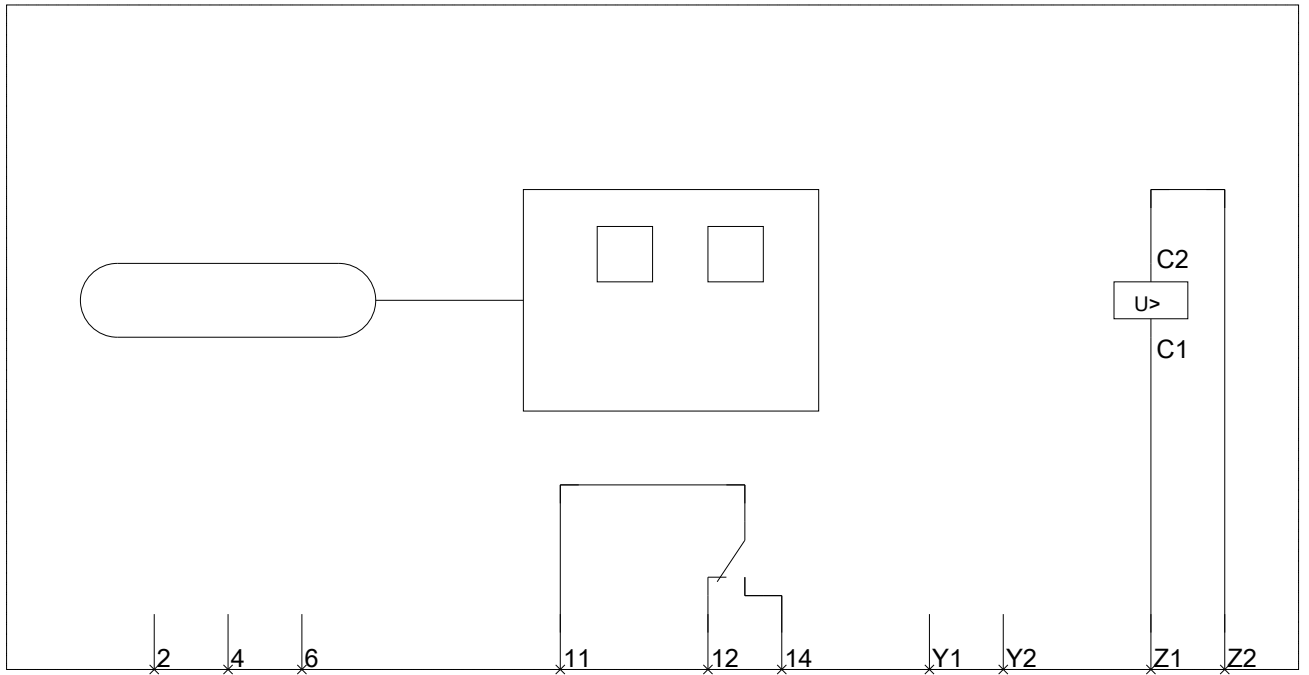

**last modified:**

05/06/2020