


Code: 22042613-00

GENERAL INFORMATION

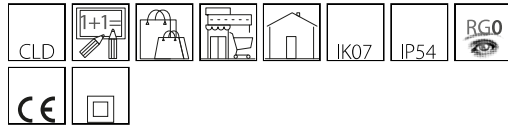

Article	0
Code	22042613-00

DIMENSIONS AND WEIGHT

Length (mm)	280 mm
Width (mm)	280 mm
Height (mm)	48 mm
Weight (Kg)	0.8 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage (V)	230 V
Frequency (Hz)	50 Hz
Wiring	CLD
Power factor	>0.9
Insulation class	Class II
Controllability	None



Pastilla is a high-efficiency LED luminaire ideal for replacing conventional lamps. Its simple and modern design allows for quick installation, also thanks to the supplied bracket. It is suited for use in corridors, staircases, bathrooms, lobbies or public areas.
Available in three sizes (220/280/330 mm) and in standard 3000K/4000K.





Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	1796 lm
Power absorption (total) (W)	18 W
CCT	4000 K
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	30000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	54

Code: 22042613-00

MATERIALS AND COLOURS


Housing	in polycarbonate, shatterproof and V2 self-extinguishing, UV stabilised, anti-yellowing.
Colour	White

STANDARDS AND COMPLIANCE

Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.

WARRANTY

After sales warranty	3 yr
----------------------	------

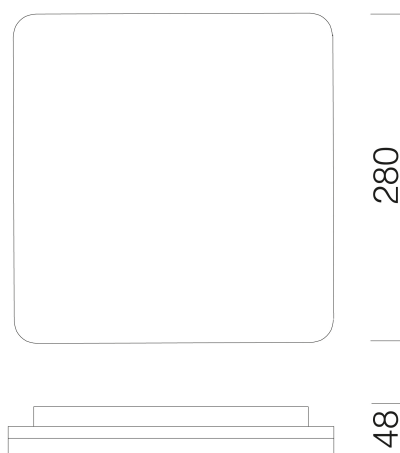**DOWNLOAD****MOUNTS****AssemblyInstructions PASTILLA Q rev2.pdf****DESIGNS****TechnicalDrawing pastq.dxf**