
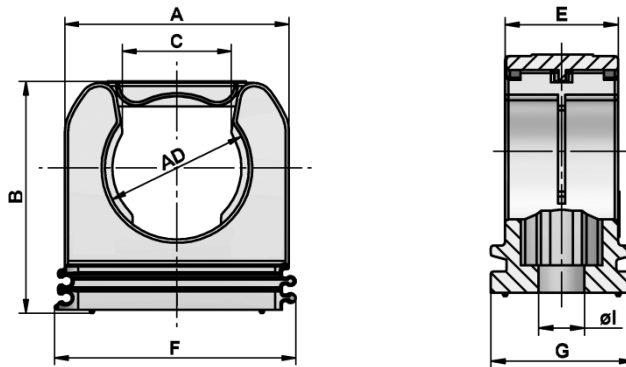


| | | |
|---------------------------|-------------------------|-------------------------------------------------------------------------------------|
| 65500630 | DATA SHEET |  |
| Valid from: 03.07.2018 | SILVYN® KLICK-RH | |

The SILVYN® KLICK-RH is a polyamide conduit clamp, the product warranted a simple and fast assembling and disassembling. In addition, the one-piece has a high tensile strength.

- Material:** PA 6
- Features:** impact resistant
- Temperature range:** -40°C up to +115°C
- Colour:** Black (UV-Resistant)
Grey (RAL 7001)



Dimensions table:

| Part No. | Part name | A mm | B mm | C mm | AD mm | F mm | E mm | Ø I mm | G mm |
|--------------|---------------------|------|------|------|-------|------|------|--------|------|
| Grey | | | | | | | | | |
| 6550 0630 | SILVYN® KLICK-RH 10 | 21 | 23,5 | 8,5 | 10 | 23 | 16 | 5,5 | 20 |
| 6550 0631 | SILVYN® KLICK-RH 13 | 25 | 25 | 9,2 | 13 | 27 | 16 | 5,5 | 20 |
| 6550 0632 | SILVYN® KLICK-RH 16 | 27 | 27 | 11,2 | 15,8 | 29 | 16 | 6,5 | 20 |
| 6550 0633 | SILVYN® KLICK-RH 18 | 31 | 31,5 | 12,7 | 18,5 | 32 | 16 | 6,5 | 20 |
| 6550 0634 | SILVYN® KLICK-RH 21 | 33 | 34 | 16,1 | 21,2 | 35 | 16 | 6,5 | 20 |
| 6550 0635 | SILVYN® KLICK-RH 28 | 40 | 40,5 | 20,5 | 28,5 | 42 | 16 | 6,5 | 20 |
| 6550 0636 | SILVYN® KLICK-RH 34 | 46 | 46,9 | 25,7 | 34,5 | 48 | 16 | 6,5 | 20 |
| 6550 0637 | SILVYN® KLICK-RH 42 | 55 | 55 | 30 | 42,5 | 57 | 16 | 6,5 | 20 |
| 6550 0638 | SILVYN® KLICK-RH 54 | 67 | 69,5 | 38 | 54,5 | 69 | 16 | 6,5 | 20 |
| Black | | | | | | | | | |
| 6550 0639 | SILVYN® KLICK-RH 10 | 21 | 23,5 | 8,5 | 10 | 23 | 16 | 5,5 | 20 |
| 6550 0640 | SILVYN® KLICK-RH 13 | 25 | 25 | 9,2 | 13 | 27 | 16 | 5,5 | 20 |
| 6550 0641 | SILVYN® KLICK-RH 16 | 27 | 27 | 11,2 | 15,8 | 29 | 16 | 6,5 | 20 |
| 6550 0642 | SILVYN® KLICK-RH 18 | 31 | 31,5 | 12,7 | 18,5 | 32 | 16 | 6,5 | 20 |
| 6550 0643 | SILVYN® KLICK-RH 21 | 33 | 34 | 16,1 | 21,2 | 35 | 16 | 6,5 | 20 |
| 6550 0644 | SILVYN® KLICK-RH 28 | 40 | 40,5 | 20,5 | 28,5 | 42 | 16 | 6,5 | 20 |
| 6550 0645 | SILVYN® KLICK-RH 34 | 46 | 46,9 | 25,7 | 34,5 | 48 | 16 | 6,5 | 20 |
| 6550 0646 | SILVYN® KLICK-RH 42 | 55 | 55 | 30 | 42,5 | 57 | 16 | 6,5 | 20 |
| 6550 0647 | SILVYN® KLICK-RH 54 | 67 | 69,5 | 38 | 54,5 | 69 | 16 | 6,5 | 20 |

Suitable: SILVYN® Rill

For more information please see our current catalogue. Please do not hesitate to contact our laboratory if there are any questions regarding resistance against aggressive agents and special oil.

| | | |
|-------------------------------------------------|---------------------------------------|-------------|
| Creator: M. Wegerer /PDP Released: DAMU1/PDP | Document: DB65500630EN Version: 01 | Page 1 of 1 |
|-------------------------------------------------|---------------------------------------|-------------|