

Toledo - UGR<22

Code: 22150210-00

GENERAL INFORMATION




Article	Toledo - UGR<22
Code	22150210-00

DIMENSIONS AND WEIGHT

Length (mm)	595 mm
Width (mm)	595 mm
Height (mm)	39 mm
Weight (Kg)	1.734 kg

ELECTRICAL CHARACTERISTICS AND CONTROLS

Voltage type	AC
Min Voltage (V)	220 V
Max Voltage (V)	240 V
Min Frequency (Hz)	50 Hz
Max Frequency (Hz)	60 Hz
Frequency (Hz)	50 Hz
Wiring name	CLD
Wiring	quick, no need to open the fixture.
Power factor	≥0.95
Insulation class	Class II
Controllability	None

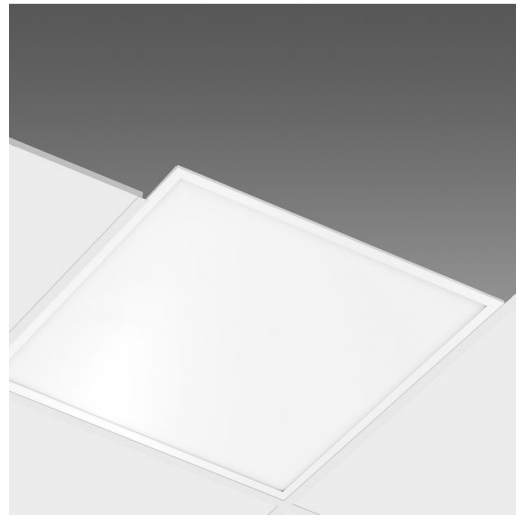


Toledo is a new recessed LED ceiling fixture in the backlight version that offers a totally innovative way to light up spaces. With a very slim shape and energy-efficient LEDs, Toledo emits bright, diffused light, and keeps energy consumption extremely low, reaffirming itself as the ideal luminaire for functional and general lighting applications.



Toledo - UGR<22

Code: 22150210-00

PHOTOMETRIC DATA

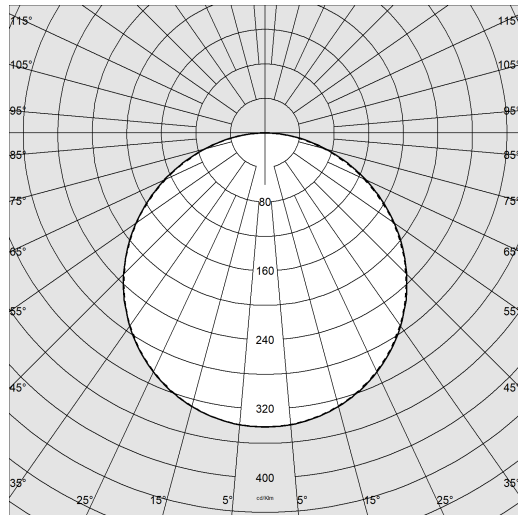

Lighting source	LED
CRI	>80
Luminous flux (output) (lm)	4375 lm
Power absorption (total) (W)	39 W
CCT	4000 K
Luminous efficacy (lm/W)	112 lm/W
Unified glare rating UGR (EN 12464-1) (Reflectance coefficient: ceiling 0.7 - walls 0.5)	UGR<22, according to standard EN 12464.
Low Flicker	luminaire with very low flicker: evenly distributed light for greater visual safety.
LED flux maintenance	50000 hr, L 80, B 20

MECHANICAL CHARACTERISTICS

Impact resistance rating (IK)	IK07
IP	40



Toledo - UGR<22

Code: 22150210-00

MATERIALS AND COLOURS

Housing	body in steel sheet and frame in aluminium.
Diffuser	in high transmittance prismatic technopolymer.
Colour	White
Equipment	Ceiling lighting fixture with external driver; it can be easily housed in false ceilings.

STANDARDS AND COMPLIANCE


Photobiological safety class	RG0
Markings and tests	CE
Reference standards	EN60598-1. With degree of protection according to EN60529.
Energy Label	F

GEAR

Upon request	- DIMM DALI CLD-D wiring (subcode -0041) - CLD-D (PUSH) (subcode -0045)
--------------	--

WARRANTY

After sales warranty	3 yr
----------------------	------

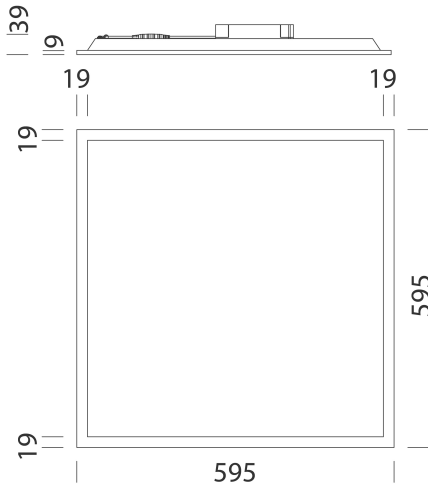

DOWNLOAD

MOUNTS

[AssemblyInstructions Kit EM Acc-960xx rev5 12-23.pdf](#)

[AssemblyInstructions TOLEDO rev8.pdf](#)


DESIGNS

[TechnicalDrawing toledo.dxf](#)



Toledo - UGR<22


Code: 22150210-00



EM Kit R



Frame for Toledo



Springs for recess mounting - Toledo